



CITY OF PROVIDENCE, RHODE ISLAND

Department of Public Property

RFP Title: Providence City Hall Elevator Replacement

Opening Date: 04/07/2025

Addendum #: 3

Issue Date: 03/27/2025

The purpose of this addendum is:

To respond to bidder questions. See
attached for pictures and answers.

City Hall Elevator Replacement Addendum 3

Bidder Questions

- 1) What day and time can we coordinate a site visit for the space above the elevator?
 - a. The City has reached out to Otis Elevators who will have a tech available on site to facilitate inspection of the top of the hoistway early next week (3/31-4/4). A meeting invite for all bidders will be sent out shortly when Otis confirms their availability.
- 2) Can you indicate the location of the EDP panel in relation to the elevator machine room?
 - a. Existing panel “EDP” is on emergency back-up power from the generator and rated for 400 amps, 208Y/120 volt, 3-phase, 4-wire. this panel is located in the upper right-hand corner of the basement, same floor as elevator machine room approx. 150’-0” from machine room. Verify exact distance in field.
- 3) What is the location and make and model of the fire alarm control panel ?
 - a. The fire alarm control panel is located next to the rear handicapped entrance to the building on the Eddy St side. It is a Honeywell panel, photos shown below.

S3 Series

encore
FIRE PROTECTION

24 HOUR EMERGENCY SERVICE
1-800-966-0000

FIRE EXTINGUISHERS • KITCHEN SYSTEMS • FIRE ALARMS
FIRE SPRINKLERS • SPECIAL HAZARDS
MONITORING

www.encorefireprotection.com

BOSTON WARTFORD PROVIDENCE
MA 02108 CT 06105 RI 02903
MA 02108A CT 06117-01 RI 02909

STATE OF RHODE ISLAND
DEPARTMENT OF STATE FIRE MARSHAL

194981

Test Date: 5-17-25

☑ Qtr. ☐ SIA

Next Due Date: 6-25

Tech Lic. # BF12357

SYSTEM INSPECTION CERTIFICATE
VALID TO INSURE PROPERTY OF RISK

FIRE ALARM HAZARD SUPERVISORY TROUBLE

10:56 AM
Tue March 25, 2025

SYSTEM NORMAL
CITY HALL

MAC DIS H2 DISC ELEV DIS SPCR DIS

AC SILENCED

MENU DRILL RESET

ENABLE


Honeywell

Garnwell
FZI

Location: 610 of Breaker Panel
Basement Area - Granite Room
Circuit Breaker # BF2-9

19019279



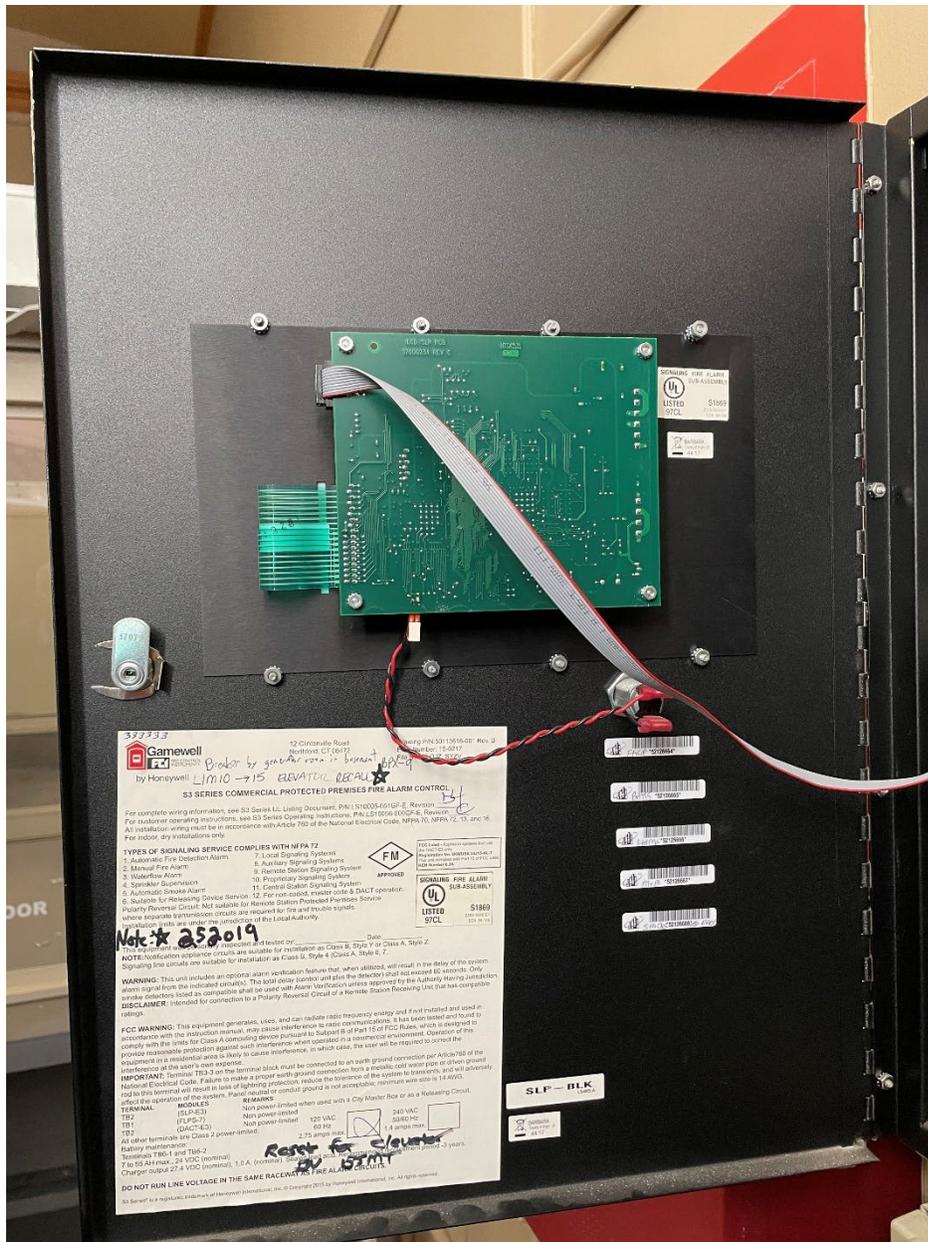

4) Will MI or CI cable be required?

a. M.I. cable is required for this installation from panel to machine room.